


TAXI MAX

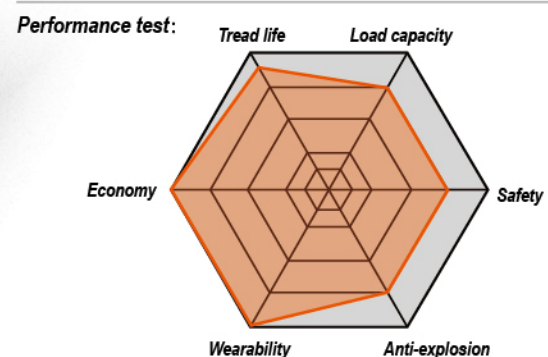

M+S

RIM SIZE	13 - 16
SERIES	55 - 80
SPEED RATING	T - V

Safety performance on wet grounds four wide longitudinal straight groove efficiently drain off water ,improving sideslip performance on wet grounds.

Comfort and quietness small cross-slots at both side of continuous circumferential ribs in the middle simulate the muffler design principle and have strong noise absorption capacity thus ,noise is effectively reduced,and riding comfort is improved..



Small shoulder circumferential longitudinal grooves at both sides and plump little pattern blocks on shoulders bring ideal rigidity and excellent handing. meanwhile,small circumferential longitudinal grooves enable tires shoulders to diffuse heat quickly,providing higher safety performance.

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA.diameter MM	Max Pressure kPa/Psi	RR	WG	SL
13'	165/70R13	79T	BSW	5.0	7.0	8.8	170	562	300/44	—	—	—
14'	175/70R14	84H	BSW	5.0	7.1	8.9	177	602	300/44	—	—	—
	185/60R14	82T	BSW	5.5	7.3	9.2	189	578	300/44	—	—	—
	195/60R14	86T	BSW	6.0	7.3	9.2	201	590	300/44	—	—	—
15'	185/65R15	88H	BSW	5.5	7.6	9.6	189	621	300/44	—	—	—
	195/55R15	85V	BSW	6.0	7.5	9.4	201	595	300/44	—	—	—
	195/60R15	88V	BSW	6.0	7.5	9.4	201	615	300/44	—	—	—
	195/65R15	91V	BSW	6.0	7.5	9.0	201	635	300/44	—	—	—
16'	205/55R16	91V	BSW	6.5	7.8	9.8	214	632	300/44	—	—	—
13'	LT165/70R13-6PR	88/86S	BSW	5.0	7.8	9.8	170	562	375/55	—	—	—