
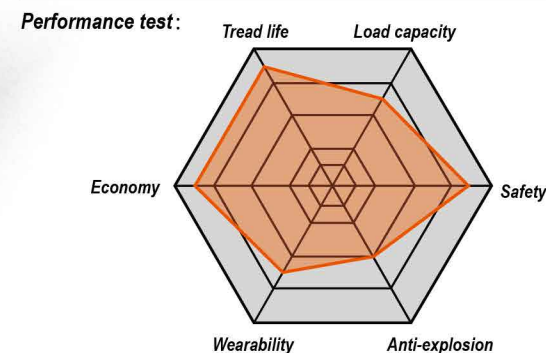


CITYROVER

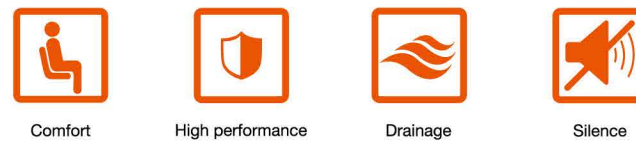

M+S

RIM SIZE	16 - 18
SERIES	55 - 85
SPEED RATING	S - H

Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.

Variable pitch pattern and solid center ribs improve the ride stability, reduce the noise and deliver a comfortable ride.



The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. Continuous tread blocks on both shoulder give great support to enhance the ride stability when cornering.

High-density sipes with special compound deliver a smooth ride and improve traction on dry and wet roads. Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability.

Wheel Diameter	Size	Index	Sidewall Description	RIM	MM	1/32"	Width MM	OA.diameter MM	Max Pressure kPa/Psi	RR	WG	SL
16'	215/70R16	100H	BLK	6.0	8.3	10.7	221	708	300/44	C	C	71
	225/70R16	107HXL	BLK	6.0	8.3	10.7	228	722	340/50	C	C	71
	235/70R16	106H	BLK	7.0	8.5	10.8	240	736	300/44	C	C	71
	245/70R16	107H	BLK	7.0	8.5	10.8	248	750	300/44	C	C	71
	245/70R16	111HXL	BLK	7.0	8.5	10.8	248	750	340/50	C	C	71
	255/65R16	109H	BLK	7.5	8.5	10.8	262	737	300/44	C	C	71
	255/70R16	111H	BLK	7.5	8.5	10.8	260	764	300/44	C	C	71
	265/70R16	112H	BLK	8.0	8.5	10.8	272	778	300/44	C	C	71
	275/70R16	114H	BLK	8.0	8.5	10.8	279	792	300/44	C	C	72
	215/60R17	96H	BLK	6.5	8.5	10.8	221	680	300/44	C	C	71
17'	215/65R17	99H	BLK	6.5	8.5	10.8	221	710	300/44	C	C	71
	225/60R17	99H	BLK	6.5	8.5	10.8	228	702	300/44	C	C	71
	225/65R17	102H	BLK	6.5	8.5	10.8	228	724	300/44	C	C	71
	235/60R17	102H	BLK	7.0	8.5	10.8	240	714	300/44	C	C	71
	235/60R17	106HXL	BLK	7.0	8.3	10.7	240	714	300/44	C	C	71
	235/65R17	104H	BLK	7.0	8.5	10.8	240	738	300/44	C	C	71
	245/65R17	107H	BLK	7.0	8.5	10.8	248	750	340/50	C	C	71
	245/65R17	111HXL	BLK	7.0	8.5	10.8	248	750	300/44	C	C	71
	255/65R17	110H	BLK	7.5	8.5	10.8	260	764	300/44	C	C	71
	265/65R17	112H	BLK	8.0	8.5	10.8	272	776	300/44	C	C	71
18'	275/65R17	115H	BLK	8.0	8.5	10.8	272	804	300/44	C	C	71
	285/65R17	115H	BLK	8.0	8.5	10.8	279	791	300/44	C	C	72
	285/65R17	116H	BLK	8.5	8.5	10.8	292	802	300/44	C	C	72
	215/55R18	96H	BLK	7.0	8.3	10.7	224	693	300/44	E	C	71
	225/55R18	98H	BLK	7.0	8.3	10.7	233	705	300/44	C	C	72
	225/60R18	104HXL	BLK	6.0	8.3	10.7	228	727	340/50	C	C	72
	235/55R18	104HXL	BLK	7.5	8.5	10.8	245	715	340/50	C	C	71
	235/60R18	107HXL	BLK	7.0	8.5	10.8	240	739	300/44	C	C	71
	235/65R18	110HXL	BLK	7.0	8.2	10.5	240	763	340/50	C	C	71
	245/60R18	105H	BLK	7.0	8.2	10.5	248	751	300/44	C	C	71
16'	255/70R18	113H	BLK	7.0	8.2	10.5	260	815	300/44	C	C	71
	265/60R18	110H	BLK	8.0	8.5	10.8	272	775	300/44	C	C	71
	275/60R18	113H	BLK	8.0	8.3	10.7	279	787	300/44	C	C	71
	275/65R18	116H	BLK	8.0	8.2	10.5	279	815	300/44	C	C	71
17'	285/60R18	116H	BLK	8.5	8.5	10.8	290	802	300/44	C	C	72
	LT225/75R16	115/112S	—	6.0	8.3	10.7	223	744	550/80	—	—	—
	LT235/85R16	120/116S	—	6.0	8.3	10.7	235	806	550/80	—	—	—
	LT245/75R16	120/116S	—	7.0	8.3	10.7	248	774	550/80	—	—	—
17'	LT265/75R16	123/120S	—	7.0	8.3	10.7	267	804	550/80	—	—	—
	LT245/75R17	121/118S	—	7.0	8.3	10.7	248	800	550/80	—	—	—
17'	LT265/70R17	121/118S	—	8.0	8.3	10.7	272	804	550/80	—	—	—